



## Energy Division

# Raychem insulation sheets HVIS Voltage class 36 kV, Max. busbar width 150 mm

### Product description

Raychem adhesive coated, heat-shrinkable sheet HVIS provides insulation enhancement and protection against accidentally induced discharge. When heated the Raychem sheet HVIS shrinks in two directions to tightly conform to complex shapes. Raychem void-filling mastic S1061, can be added to ensure that even protruding shapes are insulated. Raychem sealing mastic, S1085, can also be applied to provide an environmentally sealed connection. The sheet can be cut to size on site and loosely secured in place with clamps and brackets. The clamps and brackets can be ordered separately as

kits Raychem HVIS-TOOLS-xx. Once installed, the clamps and brackets can be removed and re-used. Raychem sheet HVIS will provide flashover protection up to 17.5 kV or up to 25 kV if the void-filling mastic is applied underneath the sheet or up to 36 kV if a double layer of HVIS is used. Re-usable joint covers can also be made to allow access or maintenance when required.

### Applications

Raychem sheet HVIS will cover almost any size or shape of busbar joint, making it ideal for insulating busbar tees, elbows and other connections where tubing and tape cannot be used.

### Features/benefits

- Compatible with all other products in the Raychem MV insulation enhancement system
- Easy to install on site using a gas torch or hot air device
- Manufactured from a non-halogen based material, noxious and corrosive effects are greatly reduced in the event of a fire
- Excellent anti-tracking properties
- Excellent UV and weather resistant properties make HVIS suitable for indoor or outdoor use
- Can be stored indefinitely at temperatures up to 50 °C without loss of performance



59B Apostolopoulou str.  
15231 Chalandri – Athens Greece  
Tel: +30 210 6754801, Fax: +30 210 6754804  
[info@enia.gr](mailto:info@enia.gr)  
[www.enia.gr](http://www.enia.gr)



Our commitment. Your advantage.

# Raychem medium voltage insulation sheets HVIS

## Clearance reduction

The tables indicate the clearance reductions which are possible using Raychem sheet HVIS. These are derived from BIL, AC withstand, DC withstand and discharge extinction tests. These clearances should not be adopted without testing by the user. Sharp electrodes and unusual geometries may require wider clearances.

## Round busbars

Rated voltage (kV)	Phase-phase (mm)	Phase-ground (mm)	IEC 71-2 air clearance (mm)
12	55	65	120
17.5	70	85	160
24	95	125	220
36	150	205	320

## Rectangular busbars

Rated voltage (kV)	Phase-phase (mm)	Phase-ground (mm)	IEC 71-2 air clearance (mm)
12	65	75	120
17.5	85	104	160
24	115	150	220
36	200	285	320

## Key product specifications

Key product specifications	Test method	Requirement
Dielectric strength	ASTM D149, IEC 243	130 kV/cm min. @ 2 mm
Accelerated ageing	ISO 188, ASTM D2671	168 hrs @ 120 °C
- Tensile strength		10 MPa min.
- Ultimate elongation		300% min.
Low temperature flexibility	ASTM D2671 Procedure C	No cracking after 4 hrs @ -40 °C
Comparative tracking index	VDE O303/1	KA 3c
Smoke index	NES 711	Less than 50
Acid gas generation	Raychem PPS 3010 4.23	Less than 2% by weight
Resistance to transformer oil	VDE O370	168 hrs @ 23 °C
- Tensile strength		7.5 MPa min.
- Ultimate elongation		300% min.

**Note:** For further product specification information see Raychem PPS 3010/25. The above information refers to backing material only, for adhesive requirements see PPS 3012/43. For void-filling mastic S1061 requirements see PPS 3012/13, for sealing mastic S1085 requirements see PPS 3012/3.


## Product selection

For rectangular busbars max. thickness 15 mm

T-connection	Busbar width (mm)	Cut size needed (mm)	No. of installations per		Flat elbow connection	Busbar width (mm)	Cut size needed (mm)	No. of installations per	
			HVIS-05 sheet	HVIS-10 rolls				HVIS-05 sheet	HVIS-10 rolls
	25	275 x 225	4	88		25	275 x 175	4	114
	50	325 x 250	4	80		50	325 x 225	4	88
	75	400 x 275	2	50		75	400 x 250	2	52
	100	450 x 325	2	44		100	450 x 275	2	44
	150	550 x 425	1	23		150	550 x 325	1	30

**Note:** These tables should be used as a guideline only. Please experiment with one or two joints before adopting final cut size. The busbars are assumed to be insulated to 25 mm from the joint. Cut size should extend a minimum of 100 mm on each leg of the joint before shrinking and should overlap existing insulation by 65 mm after shrinking.

## Ordering information

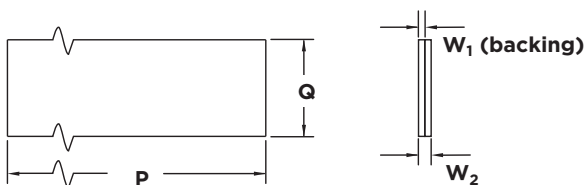

Ordering description	Dimensions				UOM
	P a (m) nom.	Q a nom.	W <sub>1</sub> b min.	W <sub>2</sub> a min.	
HVIS-05	0.5	660	1.5	2.4	sheet
HVIS-10	10.0	660	1.5	2.4	roll
S1061-8-300	0.3	60	-	-	piece
S1085-1-300	0.3	20	-	-	piece
HVIS-TOOLS-01 (basic clamp and bracket kit)					kit
HVIS-TOOLS-02 (extended clamp and bracket kit)					kit

**Note:** Dimensions in mm unless otherwise stated. a = as supplied b = after free recovery. Longitudinal and transverse change after free recovery: -25 % ±10%. Installation instructions EPP 0623 5/96 and Material Safety Data Sheet are available on request. When required, typically one piece of sealing mastic, S1085, is applied on each leg of the joint and one or two pieces of void-filling mastic, S1061, used to cover uneven shapes.

## Technical reports UVR 8114 – Qualification report for HVIS

While Tyco Electronics and its affiliates referenced herein have made every reasonable effort to ensure the accuracy of the information contained in this catalog, Tyco Electronics cannot assure that this information is error free. For this reason, Tyco Electronics does not make any representation or offer any guarantee that such information is accurate, correct, reliable or current. Tyco Electronics reserves the right to make any adjustments to the information at any time. Tyco Electronics expressly disclaims any implied warranty regarding the information contained herein, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. Tyco Electronics' only obligations are those stated in Tyco Electronics' Standard Terms and Conditions of Sale. Tyco Electronics will in no case be liable for any incidental, indirect or consequential damages arising from or in connection with, including, but not limited to, the sale, resale, use or misuse of its products. Users should rely on their own judgement to evaluate the suitability of a product for a certain purpose and test each product for its intended application. In case of any potential ambiguities or questions, please don't hesitate to contact us for clarification. Raychem, TE (logo) and Tyco Electronics are trademarks of the Tyco Electronics group of companies and its licensors.

**Energy Division – innovative and economical solutions for the electrical power industry: cable accessories, connectors & fittings, insulators & insulation, surge arresters, switching equipment, lighting controls, power measurement and control.**

Tyco Electronics Raychem GmbH  
Energy Division  
Finsinger Feld 1  
85521 Ottobrunn/Munich, Germany

Phone: +49-89-6089-0  
Fax: +49-89-6096345

<http://energy.tycoelectronics.com>

**Tyco Electronics**

Our commitment. Your advantage.